

Field Programmable Crystal Oscillator

Series:CPP

Features

- Programmed in the field with the PG-3200 oscillator programming instrument within seconds.
- Factory Programmable
- Can be programmed twice
- Standard Package Options
- Also available in 2.7V

Applications

Driving A/Ds, D/As, FPGAs
 Digital Video
 Ethernet, GbE
 Medical
 Storage Area Networking
 COTS
 Broad Band Access
 SONET/ SDH/ DWDM
 Test & Measurement



MSL: 1

Part Numbering Example:

SERIES	OUTPUT	PACKAGE STYLE	VOLTAGE	ADDED FEATURES	OPERATING TEMP.	STABILITY	FREQUENCY	TRI-STATE
CPP	C=CMOS	1 = Full Size	Blank=5.0V	Blank=Cut Tape	Blank=0°C ~ +70°C	B6=±100ppm	0.500~133.000MHz	TS=Tri-State
	T=TTL	4 = Half Size	L=3.3V	B=Bulk	A3=-55°C ~ +125°C	BP=±50ppm		PD=PowerDwn
		5 = 5X3.2 Ceramic	R=2.7V	T=Tube	A5=-20°C ~ +70°C	BR=±25ppm		
		7 = 5X7 Ceramic		Z=Tape and Reel	A7=-40°C ~ +85°C			

Specifications:

Description	Min	Typ	Max	Unit
Frequency Range: Programmable to any discrete frequency	0.500		133	MHz
Available Stability Options:	-100 -50 -25		+100 +50 +25	PPM
Programmable Supply Voltage:	(1-133 MHz) (1-100 MHz) (1-66.0 MHz)	4.5 3.0 2.5	5.0 3.3 2.7	V V V
Operating Temperature Range Options:	-55 -20 -40		+125 +70 +85	°C °C °C
Storage Temperature:	-55		+125	°C
Aging: Ta=°25C, Vdd=5V/3.3V			±5	PPM/Year

Programmable Output Level:

CMOS/TTL

Operating Conditions:

Description	Min	Max	Unit
V_{DD} Supply Voltage	2.7	5.5	V
C_{TTL} Max capacitive load on outputs for TTL levels 4.5V-5.5V V _{DD} , ≤ 40 MHz		50	pF
C_{CMOS} Max capacitive load on outputs for CMOS levels			
4.5V-5.5V V _{DD} , ≤ 66 MHz		50	pF
4.5V-5.5V V _{DD} , 66 - 133 MHz		25	pF
3.0V-3.6V V _{DD} , ≤ 40 MHz		30	pF
3.0V-3.6V V _{DD} , 40 - 100 MHz		15	pF
2.5-3.0V V _{DD} , ≤ 66 MHz		25	pF



Field Programmable Crystal Oscillator
Series:CPP
Output Clock Switching Characteristics:

Description	Test Conditions	Min	Typ	Max	Unit
Duty Cycle: TTL @ 1.4V 4.5-5.5 V _{DD}	≤ 50 MHz, C _L = 50 pF	45	-	55	%
	50 - 66 MHz, C _L = 15 pF	45	-	55	%
	66 - 125 MHz, C _L = 25 pF	40	-	60	%
	125 - 133 MHz, C _L = 15 pF	40	-	60	%
Duty Cycle: CMOS @ V _{DD} /2 4.5-5.5 V _{DD} 3.0-3.6 V _{DD}	≤ 66 MHz, C _L ≤ 25 pF	45	-	55	%
	66 - 125 MHz, C _L ≤ 25 pF	40	-	60	%
	125 - 133 MHz, C _L ≤ 15 pF	60	-	60	%
	≤ 40 MHz, C _L ≤ 30 pF	45	-	55	%
	40 - 100 MHz, C _L ≤ 15 pF	40	-	60	%
Rise/Fall:	0.8V - 2.0V, 4.5 - 5.5 V _{DD} , C _L = 50 pF			1.8	ns
	0.8V - 2.0V, 4.5 - 5.5 V _{DD} , C _L = 25 pF			1.2	ns
	0.8V - 2.0V, 4.5 - 5.5 V _{DD} , C _L = 15 pF			0.9	ns
	0.2V - 0.8 * V _{DD} , 4.5 - 5.5 V _{DD} , C _L = 50 pF			3.4	ns
	0.2V - 0.8 * V _{DD} , 3.0 - 3.6 V _{DD} , C _L = 30 pF			4.0	ns
	0.2V - 0.8 * V _{DD} , 3.0 - 3.6 V _{DD} , C _L = 15 pF			2.4	ns
Start Up Time	From Power On	-	-	2	ms
Power Down Delay Time Synchronous Asynchronous	PWR_DOWN pin LOW to output Hi-Z, T = Frequency Oscillator Period		T/2	T+10	ns
			10	15	ns
Output Disable Time Synchronous Asynchronous	OE pin LOW to output Hi-Z, T = Frequency Oscillator Period		T/2	T+10	ns
			10	15	ns
Output Enable Time				100	ns
RMS Period Jitter	≤ 33.000 MHz		40	50	ps
	> 33.000 MHz		30	40	ps
Peak to Peak*	≤ 33.000 MHz		100	250	ps
	> 33.000 MHz		75	175	ps

* Jitter Tested at > 1,000,000 samples, exceeding JEDEC std JESD65

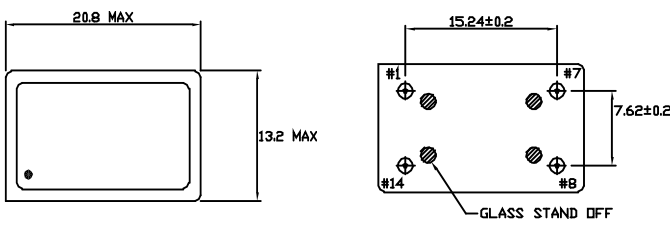
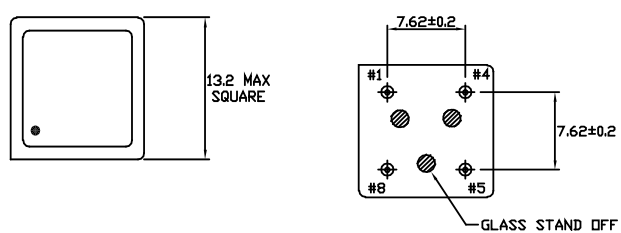
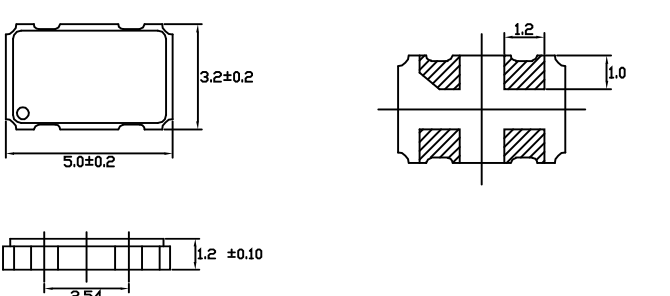
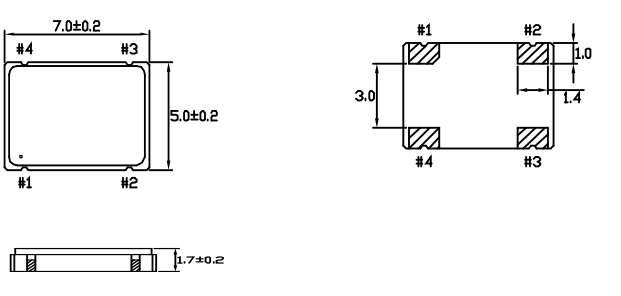
Field Programmable Crystal Oscillator
Series:CPP
Electrical Characteristics:

Description	Test Conditions	Min	Typ	Max	Unit
Input Characteristics (Pin 1):					
V _{IL} , Low-Level Input Voltage (To Tri-State or Power Down)	V _{DD} = 5.0 V	-	-	0.8	V
	V _{DD} = 3.3 V	-	-	0.2 * V _{DD}	V
	V _{DD} = 2.7 V	-	-	0.2 * V _{DD}	V
V _{IH} , High-Level Input Voltage (To Enable Output or Open)	V _{DD} = 5.0 V	2.0	-	-	V
	V _{DD} = 3.3 V	0.7 * V _{DD}	-	-	V
I _{IL} , Input Low Current	V _{IN} = 0 V	-	-	10	μA
I _{IH} , Input High Current	V _{IN} = V _{DD}	-	-	5	μA
Output Characteristics:					
V _{OL} , Low-Level Output Voltage	V _{DD} = 5.0 V, I _{OL} = 16mA	-	-	0.4	V
	V _{DD} = 3.3 V, I _{OL} = 8mA	-	-	0.4	V
V _{IHTTL} , High-Level Output Voltage	V _{DD} = 5.0 V, I _{OL} = -16mA	2.4	-	-	V
V _{IHCMOS} , High-Level Output Voltage	V _{DD} = 5.0 V, I _{OL} = -16mA	V _{DD} -0.4	-	-	V
	V _{DD} = 3.3 V, I _{OL} = -8mA	V _{DD} -0.4	-	-	V
Power Supply Current: (Unloaded)	V _{DD} = 5.0 V, F _O ≤ 133 MHz	-	-	45	mA
	V _{DD} = 3.3 V, F _O ≤ 100 MHz	-	-	25	mA
	V _{DD} = 2.7 V, F _O ≤ 66.0 MHz	-	-	20	mA
Standby Current:		-	10	50	μA
Tri-State Leakage Current	V _{DD} = 5.0 V	-	20	-	μA
Output Enable Mode:	Output is Tri-Stated				
Power Down Mode:	Output is Tri-Stated				

Field Programmable Crystal Oscillator

Series:CPP

*Note: **REQUIRED** Bypass V_{DD} to GND with a $0.01\mu\text{F}$ capacitor

Style 1 Full Size 14 pin DIP	Style 4 Half Size 8 pin DIP																				
 <table border="1" style="margin-top: 10px; border-collapse: collapse; width: 100%;"> <thead> <tr> <th style="text-align: center;">Pin #</th> <th style="text-align: center;">Function</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">1</td> <td>Control</td> </tr> <tr> <td style="text-align: center;">7</td> <td>GND</td> </tr> <tr> <td style="text-align: center;">8</td> <td>Output</td> </tr> <tr> <td style="text-align: center;">14</td> <td>V_{DD}</td> </tr> </tbody> </table>	Pin #	Function	1	Control	7	GND	8	Output	14	V_{DD}	 <table border="1" style="margin-top: 10px; border-collapse: collapse; width: 100%;"> <thead> <tr> <th style="text-align: center;">Pin #</th> <th style="text-align: center;">Function</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">1</td> <td>Control</td> </tr> <tr> <td style="text-align: center;">4</td> <td>GND</td> </tr> <tr> <td style="text-align: center;">5</td> <td>Output</td> </tr> <tr> <td style="text-align: center;">8</td> <td>V_{DD}</td> </tr> </tbody> </table>	Pin #	Function	1	Control	4	GND	5	Output	8	V_{DD}
Pin #	Function																				
1	Control																				
7	GND																				
8	Output																				
14	V_{DD}																				
Pin #	Function																				
1	Control																				
4	GND																				
5	Output																				
8	V_{DD}																				
Style 5 3.2x5 Ceramic SMD	Style 7 5x7 Ceramic SMD																				
 <table border="1" style="margin-top: 10px; border-collapse: collapse; width: 100%;"> <thead> <tr> <th style="text-align: center;">Pin #</th> <th style="text-align: center;">Function</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">1</td> <td>Control</td> </tr> <tr> <td style="text-align: center;">2</td> <td>GND</td> </tr> <tr> <td style="text-align: center;">3</td> <td>Output</td> </tr> <tr> <td style="text-align: center;">4</td> <td>V_{DD}</td> </tr> </tbody> </table>	Pin #	Function	1	Control	2	GND	3	Output	4	V_{DD}	 <table border="1" style="margin-top: 10px; border-collapse: collapse; width: 100%;"> <thead> <tr> <th style="text-align: center;">Pin #</th> <th style="text-align: center;">Function</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">1</td> <td>Control</td> </tr> <tr> <td style="text-align: center;">2</td> <td>GND</td> </tr> <tr> <td style="text-align: center;">3</td> <td>Output</td> </tr> <tr> <td style="text-align: center;">4</td> <td>V_{DD}</td> </tr> </tbody> </table>	Pin #	Function	1	Control	2	GND	3	Output	4	V_{DD}
Pin #	Function																				
1	Control																				
2	GND																				
3	Output																				
4	V_{DD}																				
Pin #	Function																				
1	Control																				
2	GND																				
3	Output																				
4	V_{DD}																				
Recommended Solder Pad Layout	Recommended Solder Pad Layout																				

