

### SOFTZORB GDS

SoftZorb GDS is a softer entry within Laird’s standard EccoSorb product line. This softer material offers easier deflection for use in cavities whenever a lid may potential contact with and compress the absorber causing possible damage to other components. In addition, Softzorb GDS’ ability to more thoroughly fill the cavity greatly increases absorber performance by limiting leakage around the absorber.

Softzorb GDS is designed for the frequency range from 18 GHz to 35 GHz expanding from the Softzorb MCS covering frequencies < 18Ghz.

### FEATURES AND BENEFITS

- High power performance and high magnetic loss
- Low deflection force enabling conformability for optimum cavity fill
- Antenna applications minimize reflections in transmission lines
- Useful in challenging compact and high tolerances stack up applications

### MARKETS

- Datacom/Telecom
- Industrial
- Consumer
- Automotive

### SPECIFICATIONS

TYPICAL PROPERTIES	DATA
Color	Dark Grey
Density (g/cc)	4.5
Effective Frequency Range	18 GHz to 35 GHz
Hardness (Shore 00)	55
Deflection (%)	>30 @ 50 psi
Volume Resistivity (Ohm-cm)	9x10 Exp 13
Dielectric Strength (V/mil)	15
Temperature Range	-70°C to 177°C
UL94-V0	Pass Internal

USA: +1.866.928.8181

Europe: +49.8031.24600

Asia: +86.755.2714.1166

[www.laird.com](http://www.laird.com)



### SZorb-GDS-121820



Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials rests with the end user. Laird Technologies makes no warranties as to the fitness, merchantability, suitability or non-infringement of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies' Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2019 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trademarks or registered trademarks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third-party intellectual property rights.

### APPLICATIONS

- This softer material can be used as an interface to fill the gap and/or balance stack up tolerances challenges without stressing the components neither the structure of the equipment .
- Can be used in commercial Datacom equipment such as optical transceiver cavities where space is at a premium and superior absorbing capabilities are required.

### AVAILABILITY

- Standard sheets are 457 x 457m (18"x18").
- Standard thicknesses are 1.0mm (0.040"), 1.5mm (0.060") , 2mm (0.08") and 2.5mm (0.100")
- Available in other sizes, and customer specified shapes upon request.

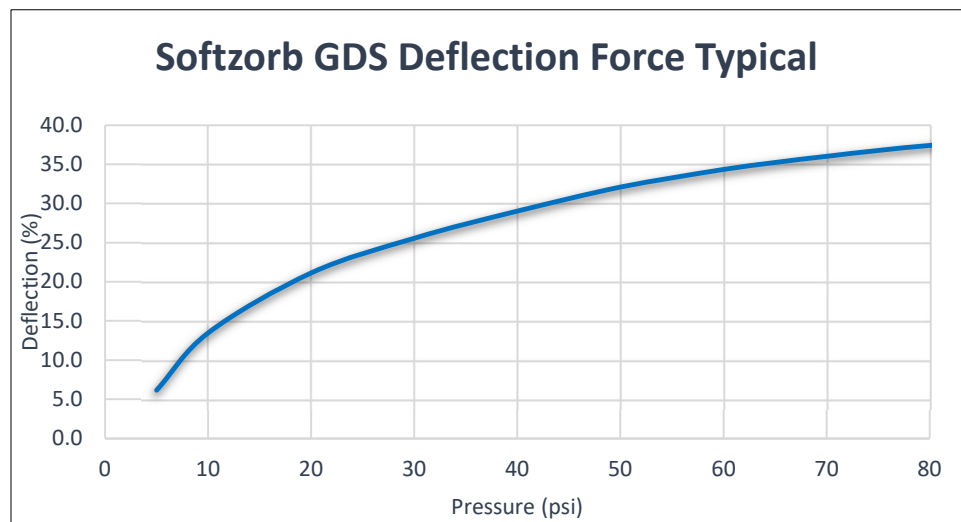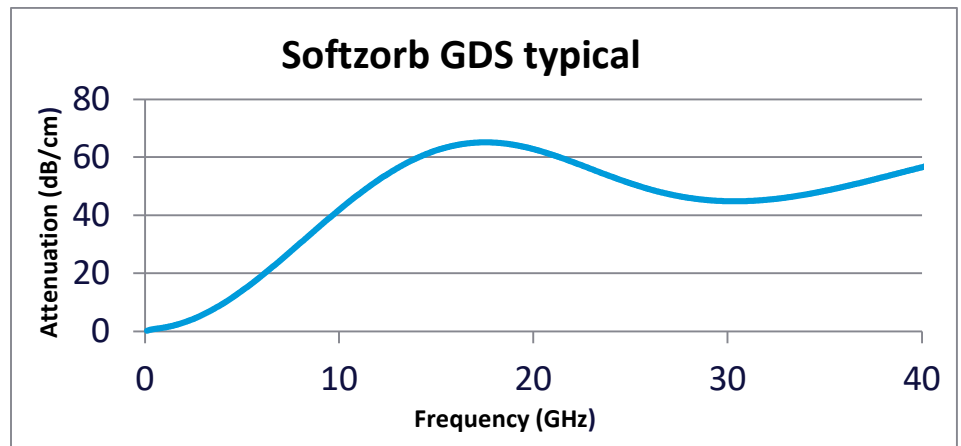

USA: +1.866.928.8181

Europe: +49.8031.24600

Asia: +86.755.2714.1166

[www.laird.com](http://www.laird.com)

