

16-bit Single Chip Microcontroller

- Smart card Interface (ISO7816-3) is embedded.
- 64KB Flash ROM: Read/program protection function, 4KB RAM
- Supports 1.8V to 5.5V wide range operating voltage.
- Equipped with an LCD driver capable of driving an 80 SEG × 16 COM / 88 SEG × 8 COM LCD panel.
- Supports various kinds of interfaces (UART, SPI, I²C)

■ DESCRIPTIONS

The S1C17M10 is a 16-bit embedded Flash MCU that features low power consumption. It includes various serial interfaces and an LCD driver on the compact die, and is ideal for battery-driven electronic equipment such as smart card read type eTokens and remote control units with a high-definition LCD display.

■ FEATURES

Model	S1C17M10
CPU	
CPU core	Seiko Epson original 16-bit RISC CPU core S1C17
Other	On-chip debugger
Embedded Flash memory	
Capacity	64K bytes (for both instructions and data)
Erase/program count	1,000 times (min.) * Programming by the debugging tool ICDmini
Other	Security function to protect from reading/programming by ICDmini On-board programming function using ICDmini Flash programming voltage can be generated internally.
Embedded RAM	
Capacity	4K bytes
Embedded display RAM	
Capacity	352 bytes
Clock generator (CLG)	
System clock source	4 sources (IOSC/OSC1/OSC3/EXOSC)
System clock frequency (operating frequency)	16.8 MHz (max.)
IOSC oscillator circuit (boot clock source)	700 kHz (typ.) embedded oscillator 23 μs (max.) starting time (time from cancelation of SLEEP state to vector table read by the CPU)
OSC1 oscillator circuit	32.768 kHz (typ.) crystal oscillator 32 kHz (typ.) embedded oscillator Oscillation stop detection circuit included
OSC3 oscillator circuit	16.8 MHz (max.) crystal/ceramic oscillator 4, 8, 12, and 16 MHz-switchable embedded oscillator Auto-trimming function for the embedded oscillator
EXOSC clock input	16.8 MHz (max.) square or sine wave input
Other	Configurable system clock division ratio Configurable system clock used at wake up from SLEEP state Operating clock frequency for the CPU and all peripheral circuits is selectable.
I/O port (PPORT)	
Number of general-purpose I/O ports	Input/output port: 32 bits (max.) Output port: 1 bit (max.) Pins are shared with the peripheral I/O.
Number of input interrupt ports	28 bits (max.)
Number of ports that support universal port multiplexer (UPMUX)	28 bits A peripheral circuit I/O function selected via software can be assigned to each port.
Timers	
Watchdog timer (WDT2)	Generates NMI or watchdog timer reset. Programmable NMI/reset generation cycle
Real-time clock (RTCA)	128-1 Hz counter, second/minute/hour/day/day of the week/month/year counters Theoretical regulation function for 1-second correction Alarm and stopwatch functions
16-bit timer (T16)	5 channels Generates the SPIA master clock.

S1C17M10


Model	S1C17M10
Timers	
16-bit PWM timer (T16B)	1 channel Event counter/capture function PWM waveform generation function Number of PWM output or capture input ports: 2 ports/channel
Supply voltage detector (SVD3)	
Detection voltage	V _{DD} or external voltage (one external voltage input port is provided and an external voltage level can be detected even if it exceeds V _{DD} .)
Detection level	V _{DD} : 28 levels (1.8 to 5.0 V)/external voltage: 32 levels (1.2 to 5.0 V)
Other	Intermittent operation mode Generates an interrupt or reset according to the detection level evaluation.
Serial interfaces	
UART (UART2)	1 channel Baud-rate generator included, IrDA1.0 supported Open drain output, signal polarity, and baud rate division ratio are configurable.
Synchronous serial interface (SPIA)	1 channel 2 to 16-bit variable data length The 16-bit timer (T16) can be used for the baud-rate generator in master mode.
I ² C (I2C) *1	1 channel Baud-rate generator included
Smart card interface (SMCIF)	1 channel Baud-rate generator included
LCD driver (LCD16A)	
LCD output	88SEG × 1–8COM (max.), 80SEG × 9–16COM (max.)
LCD contrast	16 levels
Other	1/4 or 1/5 bias power supply included, external voltage can be applied.
Multiplier/divider (COPRO2)	
Arithmetic functions	16-bit × 16-bit multiplier 16-bit × 16-bit + 32-bit multiply and accumulation unit 32-bit ÷ 32-bit divider
Reset	
#RESET pin	Reset when the reset pin is set to low.
Power-on reset	Reset at power on.
Key entry reset	Reset when the P00 to P01/P02/P03 keys are pressed simultaneously (can be enabled/disabled using a register).
Watchdog timer reset	Reset when the watchdog timer overflows (can be enabled/disabled using a register).
Supply voltage detector reset	Reset when the supply voltage detector detects the set voltage level (can be enabled/disabled using a register).
Interrupt	
Non-maskable interrupt	4 systems (Reset, address misaligned interrupt, debug, NMI)
Programmable interrupt	External interrupt: 1 system (8 levels) Internal interrupt: 14 systems (8 levels)
Power supply voltage	
V _{DD} operating voltage	1.8 to 5.5 V
V _{DD} operating voltage for Flash programming	2.4 to 5.5 V (V _{PP} = 7.5 V external power supply is required.) 2.4 to 5.5 V (When V _{PP} is generated internally)
Operating temperature	
Operating temperature range	-40 to 85 °C
Current consumption (Typ. value)	
SLEEP mode *2	0.16 μA I _{OSC} = OFF, OSC1 = OFF, OSC3 = OFF
HALT mode	0.6 μA OSC1 = 32 kHz (crystal oscillator), RTC = ON
RUN mode	4 μA OSC1 = 32 kHz (crystal oscillator), RTC = ON, CPU = OSC1 145 μA OSC1 = 32 kHz (crystal oscillator), RTC = ON, OSC3 = 1 MHz (ceramic oscillator), CPU = OSC3
Shipping form	
1 *3	TQFP15-128PIN (P-TQFP128-1414-0.40, 14 × 14 mm, t = 1.2 mm, 0.4 mm pitch)
2	Die form (Pad pitch: 80 μm (min.))

*1 The input filter in I2C (SDA and SCL inputs) does not comply with the standard for removing noise spikes less than 50 ns.

*2 The RAM retains data even in SLEEP mode.

*3 Shown in parentheses is a JEITA package name.


■ BLOCK DIAGRAM

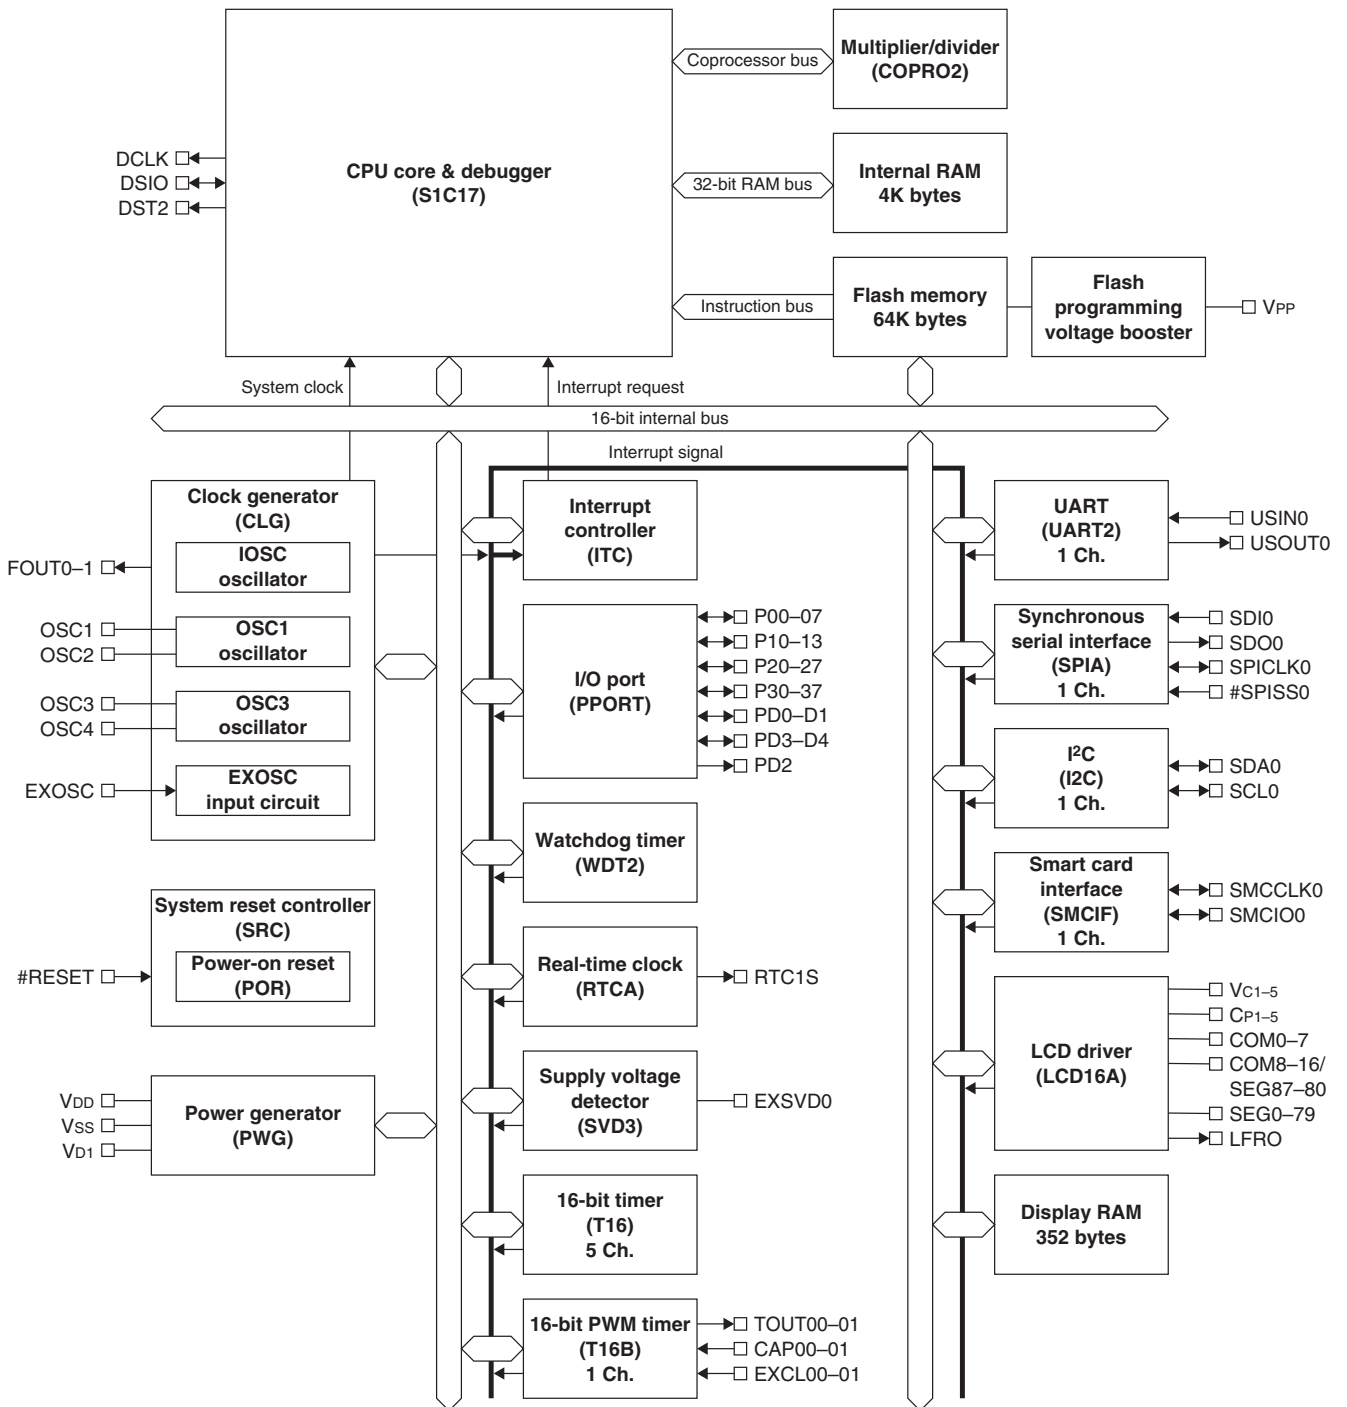


S1C17M10

PIN CONFIGURATION DIAGRAMS

TQFP15-128PIN

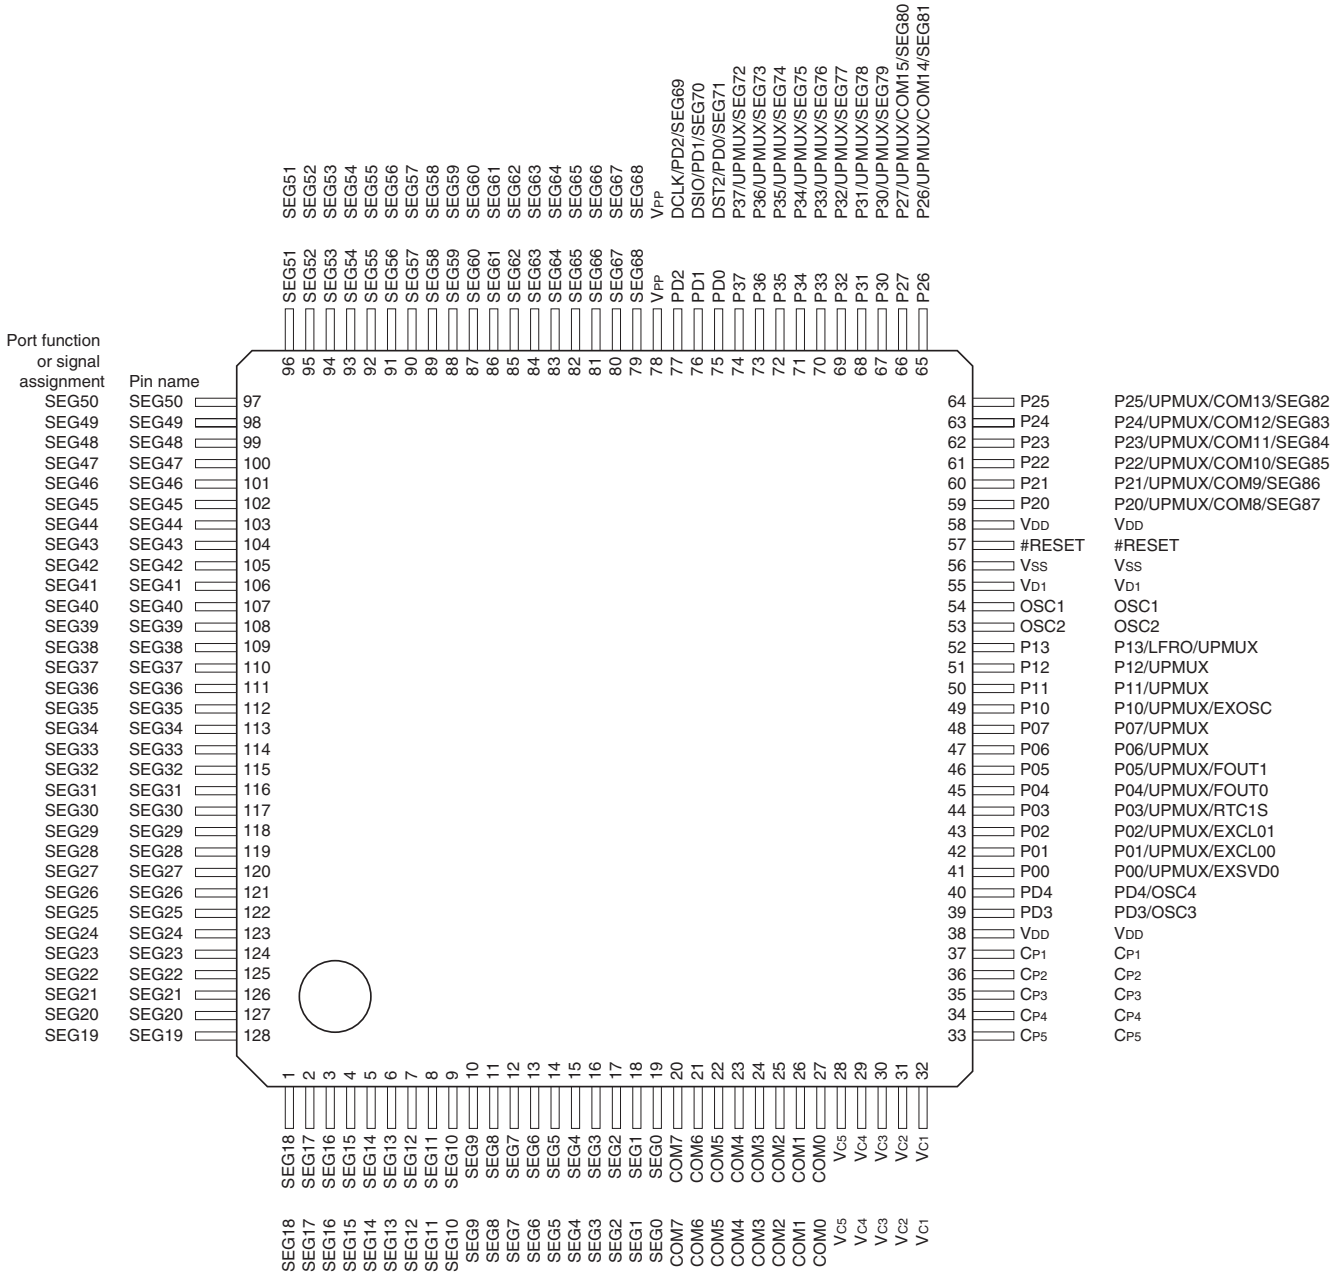

Chip

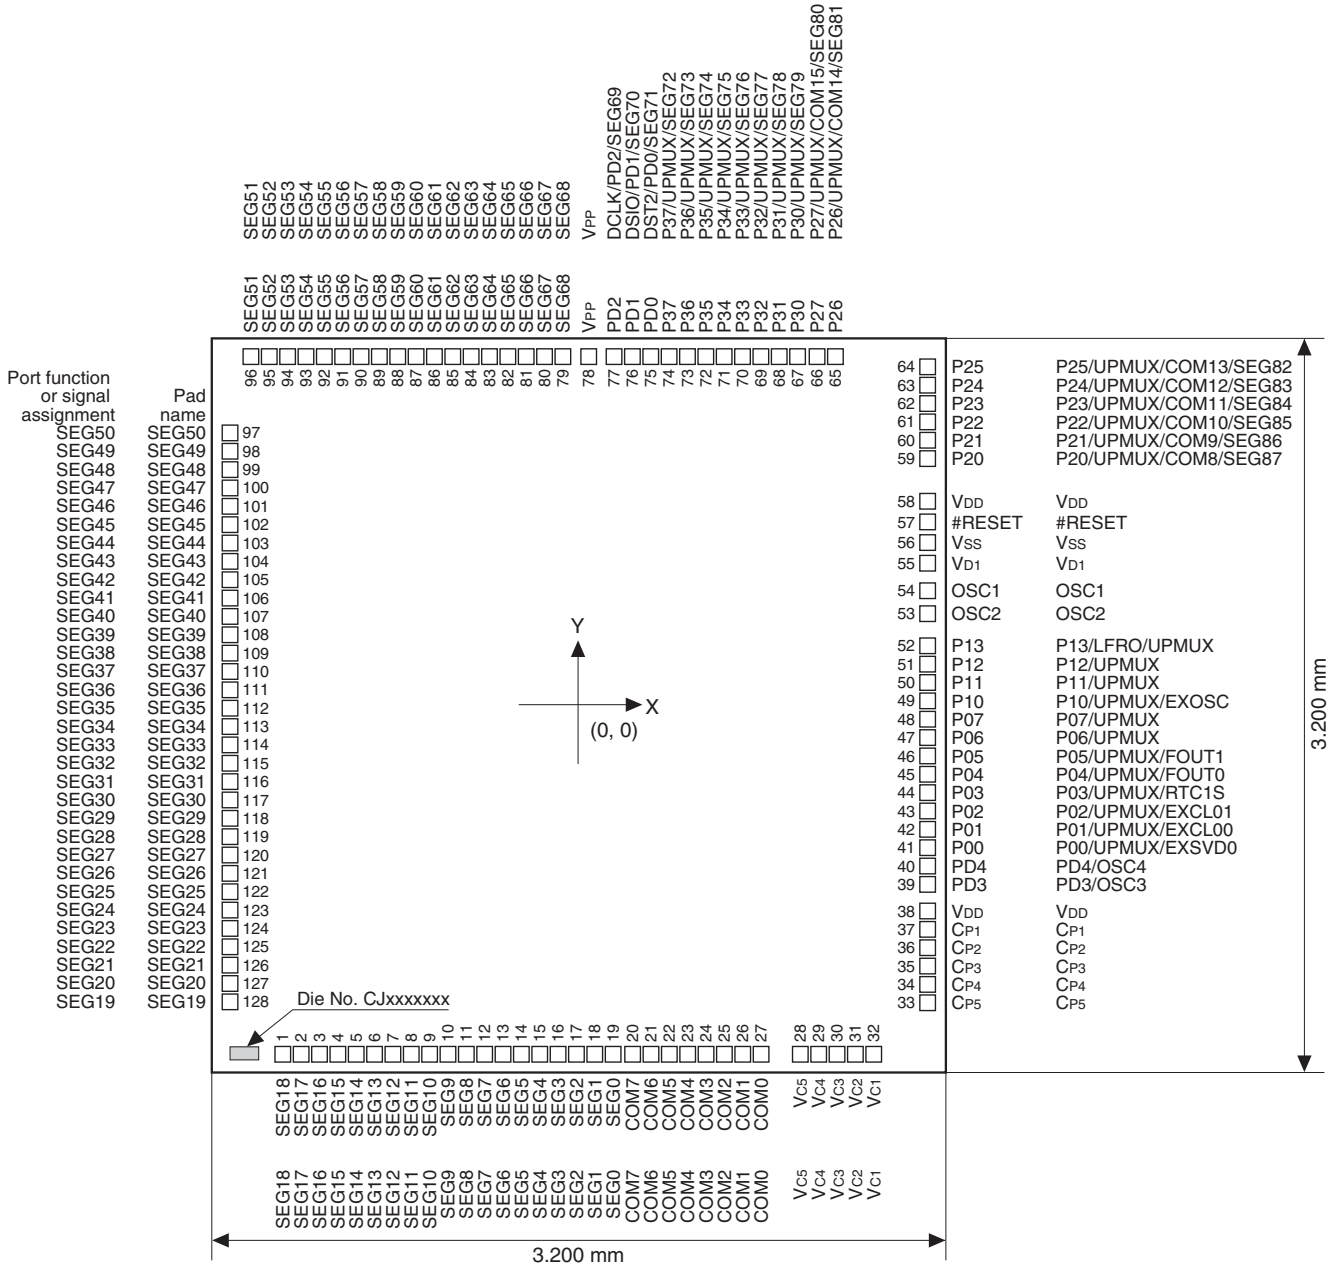

S1C17M10

■ PIN DESCRIPTIONS

Symbol meanings

Assigned signal: The signal listed at the top of each pin is assigned in the initial state. The pin function must be switched via software to assign another signal (see the “I/O Ports” chapter).

I/O:	I	= Input
	O	= Output
	I/O	= Input/output
	P	= Power supply
	A	= Analog signal
	Hi-Z	= High impedance state
Initial state:	I (Pull-up)	= Input with pulled up
	I (Pull-down)	= Input with pulled down
	Hi-Z	= High impedance state
	O (H)	= High level output
	O (L)	= Low level output

Tolerant fail-safe structure:

✓

= Over voltage tolerant fail-safe type I/O cell included (see the “I/O Ports” chapter)

The over voltage tolerant fail-safe type I/O cell allows interfacing without passing unnecessary current even if a voltage exceeding V_{DD} is applied to the port. Also unnecessary current is not consumed when the port is externally biased without supplying V_{DD} .

Pin/pad name	Assigned signal	I/O	Initial state	Tolerant fail-safe structure	Function
V_{DD}	V_{DD}	P	–	–	Power supply (+)
V_{SS}	V_{SS}	P	–	–	GND
V_{PP}	V_{PP}	P	–	–	Power supply for Flash programming
V_{D1}	V_{D1}	A	–	–	V_{D1} regulator output
V_{C1-5}	V_{C1-5}	P	–	–	LCD panel driver power supply
$CP1-5$	$CP1-5$	A	–	–	LCD power supply booster capacitor connect pins
OSC1	OSC1	A	–	–	OSC1 oscillator circuit input
OSC2	OSC2	A	–	–	OSC1 oscillator circuit output
#RESET	#RESET	I	I (Pull-up)	–	Reset input
P00	P00	I/O	Hi-Z	✓	I/O port
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
	EXSVD0	A			External power supply voltage detection input
P01	P01	I/O	Hi-Z	✓	I/O port
	EXCL00	I			16-bit PWM timer Ch.0 event counter input 0
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
P02	P02	I/O	Hi-Z	✓	I/O port
	EXCL01	I			16-bit PWM timer Ch.0 event counter input 1
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
P03	P03	I/O	Hi-Z	✓	I/O port
	RTC1S	O			Real-time clock 1-second cycle pulse output
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
P04	P04	I/O	Hi-Z	✓	I/O port
	FOUT0	O			Clock external output
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
P05	P05	I/O	Hi-Z	✓	I/O port
	FOUT1	O			Clock external output
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
P06	P06	I/O	Hi-Z	✓	I/O port
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
P07	P07	I/O	Hi-Z	✓	I/O port
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
P10	P10	I/O	Hi-Z	✓	I/O port
	EXOSC	I			Clock generator external clock input
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
P11	P11	I/O	Hi-Z	✓	I/O port
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
P12	P12	I/O	Hi-Z	✓	I/O port
	UPMUX	I/O			User-selected I/O (universal port multiplexer)

Pin/pad name	Assigned signal	I/O	Initial state	Tolerant fail-safe structure	Function
P13	P13	I/O	Hi-Z	✓	I/O port
	LFRO	O			LCD frame signal monitor output
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
P20	P20	I/O	Hi-Z	✓	I/O port
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
	COM8	A			LCD common output
	SEG87	A			LCD segment output
P21	P21	I/O	Hi-Z	✓	I/O port
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
	COM9	A			LCD common output
	SEG86	A			LCD segment output
P22	P22	I/O	Hi-Z	✓	I/O port
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
	COM10	A			LCD common output
	SEG85	A			LCD segment output
P23	P23	I/O	Hi-Z	✓	I/O port
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
	COM11	A			LCD common output
	SEG84	A			LCD segment output
P24	P24	I/O	Hi-Z	✓	I/O port
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
	COM12	A			LCD common output
	SEG83	A			LCD segment output
P25	P25	I/O	Hi-Z	✓	I/O port
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
	COM13	A			LCD common output
	SEG82	A			LCD segment output
P26	P26	I/O	Hi-Z	✓	I/O port
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
	COM14	A			LCD common output
	SEG81	A			LCD segment output
P27	P27	I/O	Hi-Z	✓	I/O port
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
	COM15	A			LCD common output
	SEG80	A			LCD segment output
P30	P30	I/O	Hi-Z	✓	I/O port
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
	SEG79	A			LCD segment output
P31	P31	I/O	Hi-Z	✓	I/O port
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
	SEG78	A			LCD segment output
P32	P32	I/O	Hi-Z	✓	I/O port
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
	SEG77	A			LCD segment output
P33	P33	I/O	Hi-Z	✓	I/O port
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
	SEG76	A			LCD segment output
P34	P34	I/O	Hi-Z	✓	I/O port
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
	SEG75	A			LCD segment output
P35	P35	I/O	Hi-Z	✓	I/O port
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
	SEG74	A			LCD segment output
P36	P36	I/O	Hi-Z	✓	I/O port
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
	SEG73	A			LCD segment output
P37	P37	I/O	Hi-Z	✓	I/O port
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
	SEG72	A			LCD segment output
PD0	DST2	O	O (L)	✓	On-chip debugger status output
	PD0	I/O			I/O port
	SEG71	A			LCD segment output

S1C17M10


Pin/pad name	Assigned signal	I/O	Initial state	Tolerant fail-safe structure	Function
PD1	DSIO	I/O	I (Pull-up)	✓	On-chip debugger data input/output
	PD1	I/O			I/O port
	SEG70	A			LCD segment output
PD2	DCLK	O	O (H)	-	On-chip debugger clock output
	PD2	O			Output port
	SEG69	A			LCD segment output
PD3	PD3	I/O	Hi-Z	✓	I/O port
	OSC3	A			OSC3 oscillator circuit input
PD4	PD4	I/O	Hi-Z	✓	I/O port
	OSC4	A			OSC3 oscillator circuit output
COM0-8	COM0-8	A	Hi-Z	-	LCD common output
SEG0-68	SEG0-68	A	Hi-Z	-	LCD segment output

Universal port multiplexer (UPMUX)

The universal port multiplexer (UPMUX) allows software to select the peripheral circuit input/output function to be assigned to each pin from those listed below. Note, however, that a function cannot be assigned to two or more pins simultaneously.

Peripheral circuit	Signal to be assigned	I/O	Channel number n	Function
Synchronous serial interface (SPIA)	SDIn	I	$n = 0$	SPIA Ch. n data input
	SDOn	O		SPIA Ch. n data output
	SPICLK n	I/O		SPIA Ch. n clock input/output
	#SPISS n	I		SPIA Ch. n slave-select input
I ² C (I2C)	SCL n	I/O	$n = 0$	I2C Ch. n clock input/output
	SDA n	I/O		I2C Ch. n data input/output
UART (UART2)	USIN n	I	$n = 0$	UART2 Ch. n data input
	USOUT n	O		UART2 Ch. n data output
16-bit PWM timer (T16B)	TOUT $n0$ /CAP $n0$	I/O	$n = 0$	T16B Ch. n PWM output/capture input 0
	TOUT $n1$ /CAP $n1$	I/O		T16B Ch. n PWM output/capture input 1
Smart card interface (SMCIF)	SMCCLK n	I/O	$n = 0$	SMCIF Ch. n clock input/output
	SMCIO n	I/O		SMCIF Ch. n data input/output

■ BASIC EXTERNAL CONNECTION DIAGRAM

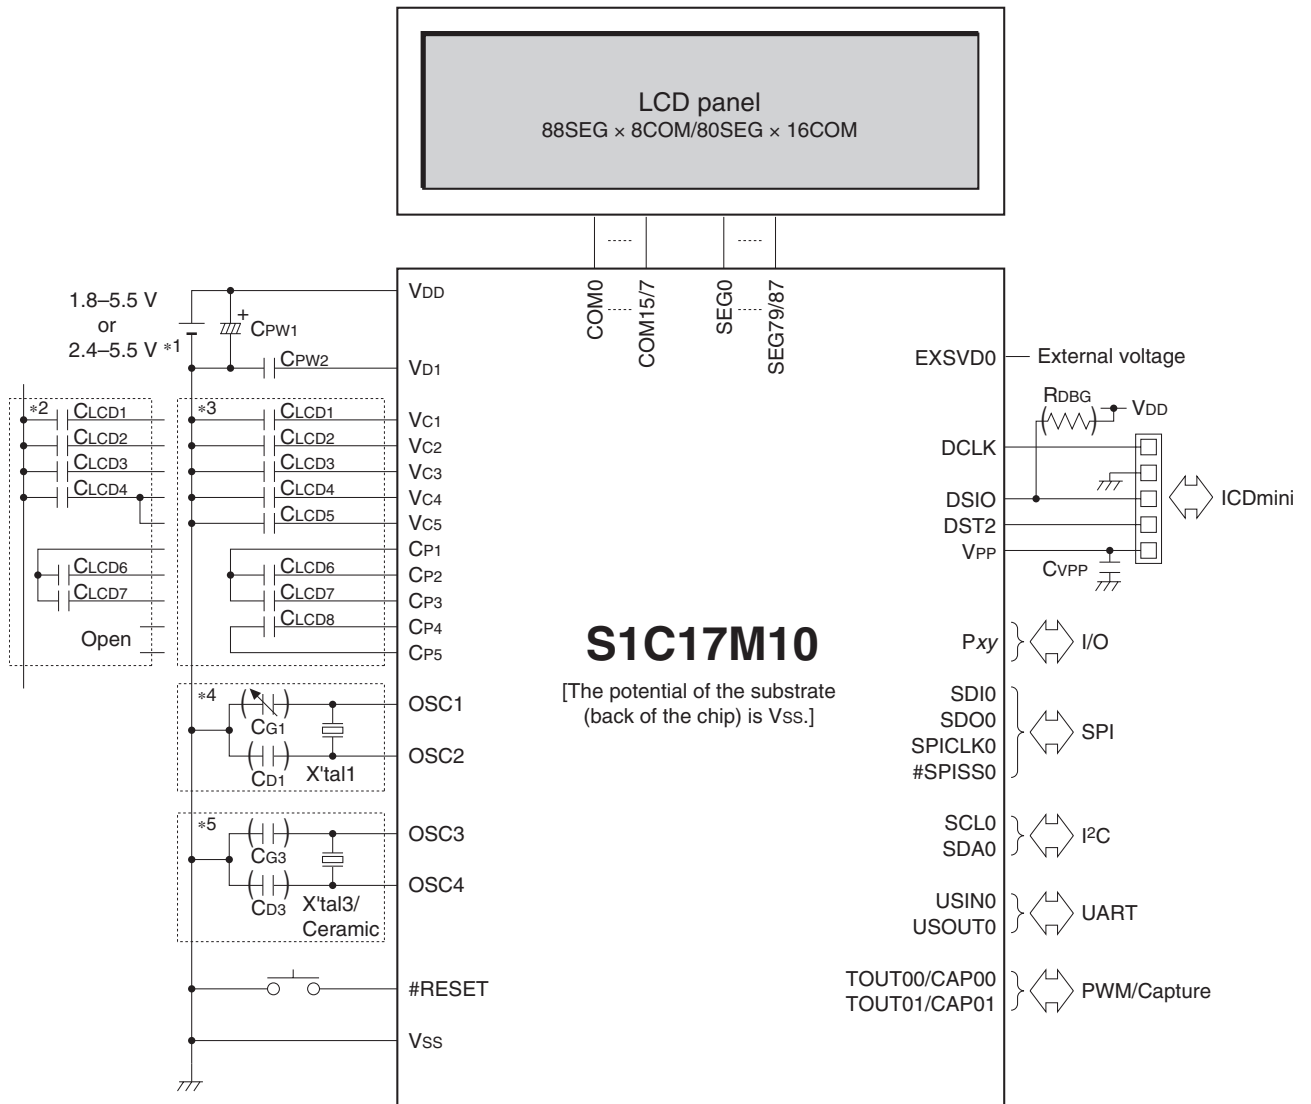

- *1: For Flash programming
- *2: When 1/4 bias is selected
- *3: When 1/5 bias is selected
- *4: When OSC1 crystal oscillator is selected
- *5: When OSC3 crystal/ceramic oscillator is selected
- (): Do not mount components if unnecessary.

S1C17M10

NOTICE : PLEASE READ CAREFULLY BELOW BEFORE USING THIS DOCUMENT

The contents of this document are subject to change without notice.

1. This document may not be copied, reproduced, or used for any other purpose, in whole or in part, without the consent of the Seiko Epson Corporation ("Epson").
2. Before purchasing or using Epson products, please contact our sales representative for the latest information and always be sure to check the latest information published on Epson's official web sites and other sources.
3. Information provided in this document such as application circuits, programs, usage, etc., are for reference purposes only. Using the application circuits, programs, usage, etc. in the design of your equipment or systems is your own responsibility. Epson makes no guarantees against any infringements or damages to any third parties' intellectual property rights or any other rights resulting from the information. This document does not grant you any licenses, intellectual property rights or any other rights with respect to Epson products owned by Epson or any third parties.
4. Epson is committed to constantly improving quality and reliability, but semiconductor products in general are subject to malfunction and failure. By using Epson products, you shall be responsible for your hardware. Software and systems must be designed well enough to prevent death or injury as well as any property damage even if any of the malfunctions or failures might be caused by Epson products. When designing your products using Epson products, please be sure to check and comply with the latest information regarding Epson products (this document, specifications, data sheets, manuals, Epson's web site, etc.). When using the information included above materials such as product data, charts, technical contents, programs, algorithms and application circuit examples, you shall evaluate your products both on a stand-alone basis as well as within your overall systems. You shall be solely responsible for deciding whether or not to adopt and use Epson products.
5. Epson has prepared this document and programs provided in this document carefully to be accurate and dependable, but Epson does not guarantee that the information and the programs are always accurate and complete. Epson assumes no responsibility for any damages which you incur due to misinformation in this document and the programs.
6. No dismantling, analysis, reverse engineering, modification, alteration, adaptation, reproduction, etc., of Epson products is allowed.
7. Epson products have been designed, developed and manufactured to be used in general electronic applications (office equipment, communications equipment, measuring instruments, home electronics, etc.) and applications individually listed in this document ("General Purpose"). Epson products are NOT intended for any use beyond the General Purpose uses that requires particular/higher quality or reliability in order to refrain from causing any malfunction or failure leading to death, injury, serious property damage or severe impact on society, including, but not limited to those listed below. Therefore, you are advised to use Epson products only for General Purpose uses. Should you desire to buy and use Epson products for a particular purpose other than a General Purpose use, Epson makes no warranty and disclaims with respect to Epson products, whether express or implied, including without limitation any implied warranty of merchantability or fitness for any particular purpose. Please be sure to contact our sales representative and obtain approval in advance.
 - [Particular purpose]
 - Space equipment (artificial satellites, rockets, etc.)
 - Transportation vehicles and their control equipment (automobiles, aircraft, trains, ships, etc.)
 - Medical equipment (other than applications individually listed in this document) / Relay equipment to be placed on ocean floor
 - Power station control equipment / Disaster or crime prevention equipment / Traffic control equipment / Financial equipment
 - Other applications requiring similar levels of reliability as those listed above
8. Epson products listed in this document and our associated technologies shall not be used in any equipment or systems that laws and regulations in Japan or any other countries prohibit to manufacture, use or sell. Furthermore, Epson products and our associated technologies shall not be used for developing weapons of mass destruction, or any other military purposes or applications. If exporting Epson products or our associated technologies, you shall comply with the Foreign Exchange and Foreign Trade Control Act in Japan, Export Administration Regulations in the U.S.A. (EAR) and other export-related laws and regulations in Japan and any other countries and follow the required procedures as provided by the relevant laws and regulations.
9. Epson assumes no responsibility for any damages (whether direct or indirect) caused by or in relation with your non-compliance with the terms and conditions in this document.
10. Epson assumes no responsibility for any damages (whether direct or indirect) incurred by any third party that you assign, transfer, loan, etc., Epson products to.
11. For more details or other concerns about this document, please contact our sales representative.
12. Company names and product names listed in this document are trademarks or registered trademarks of their respective companies.

(Rev. e1.0, 2021.9)

©Seiko Epson Corporation 2022, All rights reserved.

SEIKO EPSON CORPORATION

Sales & Marketing Division

MD Sales & Marketing Department
JR Shinjuku Miraina Tower, 4-1-6 Shinjuku,
Shinjuku-ku, Tokyo 160-8801, Japan

EPSON semiconductor website

https://global.epson.com/products_and_drivers/semicon/

Document Code: 413181901
First Issue February 2016
Revised August 2022 in JAPAN ©