


**DIMENSIONAL PROPERTIES**

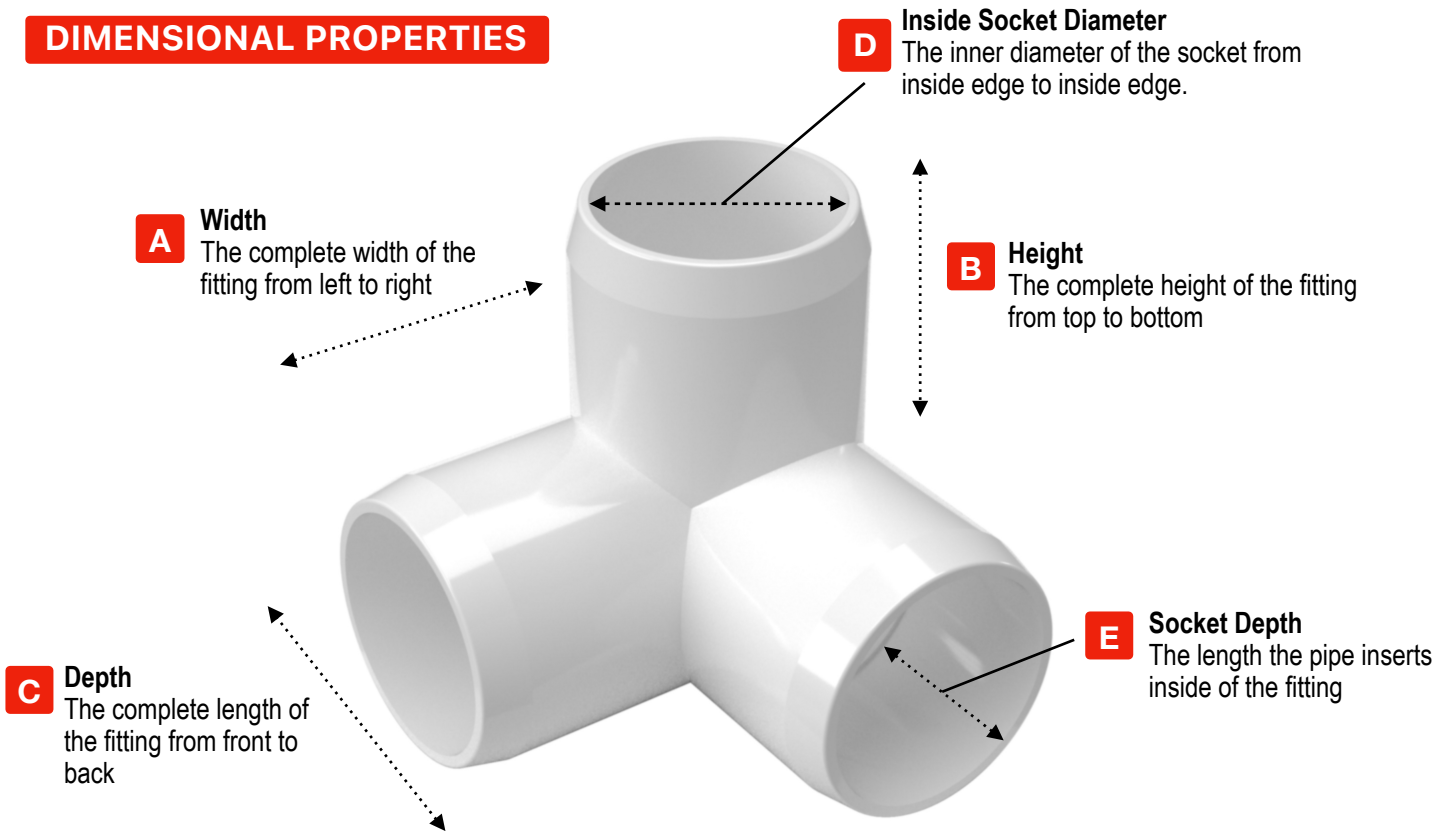

PVC Size	SKU	Width	Height	Depth	Socket Diameter	Socket Depth	Weight
		<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>E</b>	
1/2"	050-3W	1.785"	1.785"	1.785"	0.840"	0.750"	0.060 lb.
3/4"	075-3W	2.250"	2.250"	2.250"	1.505"	1.000"	0.120 lb.
1"	100-3W	2.835"	2.835"	2.835"	1.315"	1.250"	0.180 lb.
1-1/4"	125-3W	3.352"	3.352"	3.352"	1.660"	1.500"	0.275 lb.
1-1/2"	150-3W	3.560"	3.560"	3.560"	1.900"	1.500"	0.363 lb.
2"	200-3W	4.038"	4.038"	4.038"	2.375"	1.312"	0.410 lb.

**MATERIAL & MECHANICAL PROPERTIES**

- UV-resistant for outdoor use for full sunlight exposure.
- Impact resistant for increased durability
- Material is self-extinguishing
- Heavy metal and phthalate-free
- Glossy surface finish for a professional appearance.
- Compatible with standard Schedule 40 PVC pipe.
- Can be secured with clear PVC cement/solvents or with fasteners.