



Que-2-TXT™
Questions?
scan to text us fast



HID EQUAL LED LAMPS

240° BEAM ANGLE

400W

HID equal

specifications

Consumption	Voltage	CRI	Lens	Heat Sink	L70 hours	Surge Protection	Ambient Temp (F)	Power Factor	UL listing	THD	Beam Angle	Enclosed Fixture Rated
90 W	100 - 277 V ⚡	> 80	frosted polycarbonate	plastic-coated aluminum	50,000	2.5 KV built-in	-22° - 113°	> 0.9	wet location	< 20%	240°	yes

select your lamp

Part Number	Color Temp	Base	Lumen Output	Efficacy
GI-CC-240WW400-UL3	2700K	EX39	13,600	151 lm / W
GI-CC-240C400-UL3	5000K	EX39	13,600	151 lm / W

other


Dimensions	Warranty	Weight	Case QTY
10.3" (L) x 5.2" (D)	6 years	2.4 lbs	6 pcs



Features

- ▶ 100% potted drivers- protects electronics against moisture and vibration
- ▶ 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations
- ▶ Shatterproof
- ▶ Waterproof design for weather-exposed applications
- ▶ Frosted lens design for open fixtures

Luminous Intensity Distribution

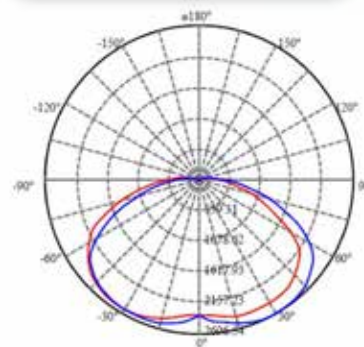

Lux vs Distance



Not all product variations listed on this page may be DLC qualified. Visit www.designlights.org/search to confirm qualification.



/greenignite
@greenignite



www.greenignite.com



info@greenignite.com



1-877-560-3779